

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088568 A2

(51) International Patent Classification⁷: G06G

(21) International Application Number: PCT/TB2004/050356

(22) International Filing Date: 29 March 2004 (29.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03100906.1 4 April 2003 (04.04.2003) EP

(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): GIRALDO, Andrea [IT/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). JOHNSON, Mark, T. [GB/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). JANS, William, P., M.,


(74) Agent: ROLFES, Johannes, G., A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: DISPLAY DEVICE

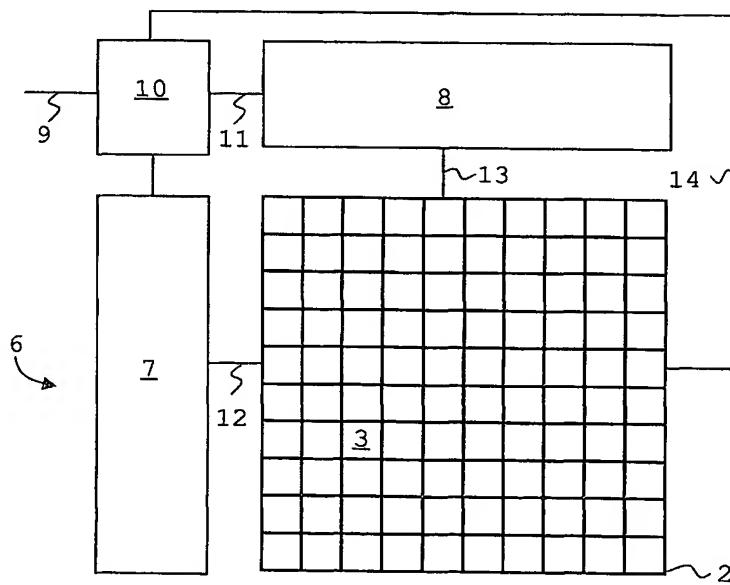

WO 2004/088568 A2

(57) Abstract: The display device (6) comprises a display (2) and generating means (10,8). The display (2) has a plurality of light emitting elements (3), and data lines (13) for providing pulse width modulation (PWM) signals to the light emitting elements (3). The generating means (10, 8) are coupled to the data lines (13) for generating, during time intervals (SF) of a frame period, at least a first non-zero emission level (L(V1; C1; I1)) of a light emitting element (3) during a first one of the time intervals (SF) and a second non-zero emission level (L(V2; C2; I2)) during a second one of the time intervals (SF).



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*